

● Description

E103F, E180F, and E220F are EVA resins for crosslinked foam applications including mid-sole and in-sole of athletic shoes. These grades are designed to be processed in conventional kneading and rolling equipment for mixing and dispersing crosslinking agent and foaming agent.

● Characteristics

These grades offer good processability during compounding with various additives. Foamed products made of these grades provide excellent spilt tear resistance, superb tensile and elongation properties, and good compression set characteristics.

● Applications

▶ Athletic shoe mid-soles and in-soles, Sandals, Cushion padding

● Physical Properties

Properties	Test Method	Units	E220F	E180F	E103F
Melt Index (190°C/2.16 kg)	ASTM D 1238	g/10 min	3.0	2.0	1.6
Density	STC Method	g/cm ³	0.944	0.940	0.938
VA Content	STC Method	%	22	18	10
Tensile Strength at Break	ASTM D 738	kg/cm ²	29.0	26.0	20.0
Elongation at Break	ASTM D 738	%	80.0	70.0	70.0
Flexural Stiffness	ASTM D 747	kg/cm ²	40.0	0.0	0.0
Shore Hardness	ASTM D 2240	A scale	90	92	94
		D scale	30	38	39
Vicat Softening Point	ASTM D 1020	°C	00.0	64.0	69.0
Melting Point	STC Method	°C	87.0	93.0	90.0
Brittleness Temp.	ASTM D 746	°C	<-7.0	<-7.0	<-7.0
E.S.C.R (at 0°C, 1%, F ₁₀)	ASTM D 1693	Hrs	>0.0	>0.0	>0.0


* Data shown above are representative values for reference purposes only, and not to be construed as specifications.

● General Processing Guide

The compression foaming process is generally composed of three distinct steps: kneading, addition of crosslinking and foaming agents by roll milling, and foaming by compression molding.

At the kneading step, the temperature should be maintained in the range 90 ~ 100 °C to provide good dispersion of additives and filler in the molten resin. The selection of a specific kneading temperature will depend on factors such as VA content in the resin, type and content of filler and other additives, and machine variables. The crosslinking and blowing agents are mixed with molten compounded resin in the roll milling process below 110 °C to avoid premature crosslinking and foaming. Often the roll milling process is repeated several times to get more uniform mixing of crosslinking and foaming agents. After the roll milling step, the compound sheet is compression molded to obtain a foamed sheet. Selection of curing temperature, pressure, and curing time depends on desired property of the final product as well as mold thickness.

▶ Effect of additive contents for E22-F

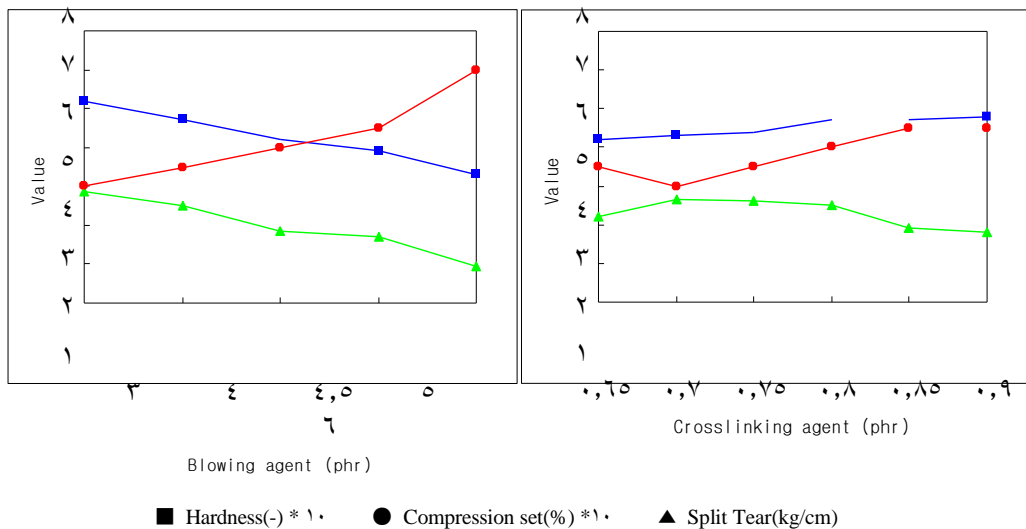

* Foaming Conditions

- Mold Dimension 100 * 100 * 20mm
- Temperature 100 °C
- Pressure 100 kg/cm²
- Curing Time 40 min

● **Food Contact Application**

- ▶ There may be some limitation to apply Samsung Total E₁03F, E₁80F, E₁20F to the food packaging
- ▶ Thus, the verification on the suitability is necessary. In case you might need additional information, please contact Samsung Total Customer Service Team.

● **Other Information**

The information in this document can be used for reference only, not to be construed as specification. Customers are responsible for determine whether our product and information is suitable for their particular purpose and for the compliance with related law.

SAMSUNG TOTAL assumes no obligation or liability for the information in this document.


● **Contacts**

▶ **Product Information & Technical Services**

411-1, Dokgod Ri, Daesan Up, Seosan Si, Chung Nam, Korea 306-711

TEL : 82-41-760-7190

FAX : 82-41-760-7189

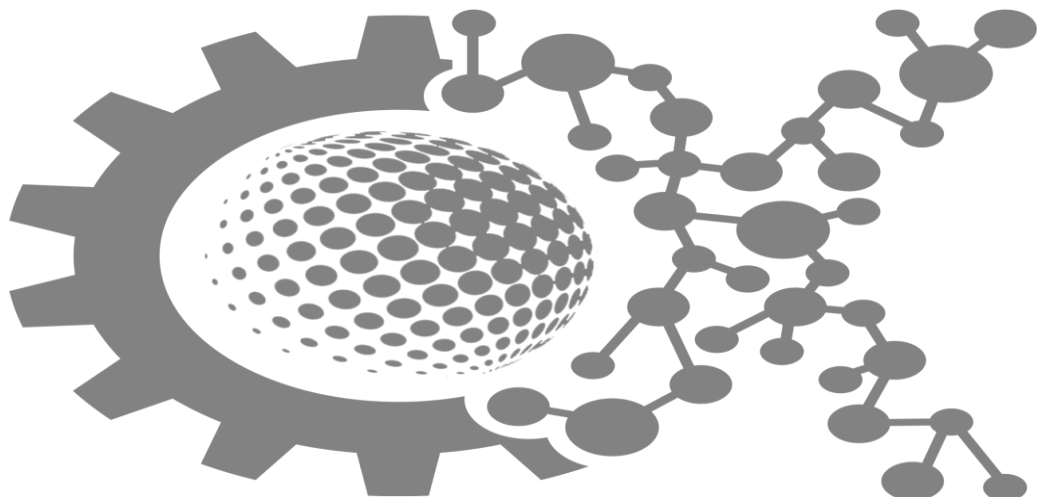

Alfa Polymer Kimia